

CRAWL CLAW GRAB HANDLES PARTS #0124-10101 #0124-10201

BEFORE YOU BEGIN

Thank you for purchasing these Fly Offroad Crawl Claw Grab Handles and joining us in *The Pursuit of Freedom!* Please inspect the package contents upon opening. Ensure it is complete according to the parts list below and that none of the contents are damaged. If there are any discrepancies contact Fly Offroad at info@flyoffroad.com and we will correct the error. Read these instructions fully before beginning the installation. If you are not confident in your ability to use a ratcheting wrench and hex key please consult a professional before attempting. Contact Fly Offroad before you begin the installation If you have any questions or concerns.

APPLICATIONS

These installations instructions apply to the following Fly Offroad products:



0124-02101 Crawl Claw Grab Handles, Front
0124-02201 Crawl Claw Grab Handles, Rear

PARTS LIST 0124-10101, FRONT

Part	Qty
Crawl Claw Grab Handle, Front Driver	1
Crawl Claw Grab Handle, Front Passenger	1
Lower Spacer, 1.625"	2
Upper Spacer, 2.53"	2
Hardware Pack consisting of:	
M8 x 1.25mm Flat Head Screw, 80mm long	2
M8 x 1.25mm Flat Head Screw, 100mm long	2

PARTS LIST 0124-10201, REAR

Part	Qty
Crawl Claw Grab Handle, Rear Driver	1
Crawl Claw Grab Handle, Rear Passenger	1
Hardware Pack consisting of:	
M6 x 1mm Flat Head Screw, 65mm long	4

TOOLS NEEDED

- Front Assembly
 5mm Hex Head Key
 18mm Socket & Ratchet (removal of stock hardware)
- Rear Assembly
 4mm Hex Head Key
 10mm Socket & Ratchet (removal of stock hardware)

IMPORTANT INFORMATION

- Fly Offroad Crawl Claw Grab Handles are designed to be installed into the stock, undamaged, Jeep JK A-pillar and sun visor mounts for the front handles and into the rear speaker bar mounts for the rear handles. Installing into a damaged location will void all warranties and is asking for grave bodily harm, death, or extreme embarrassment as your trail mates laugh at you when you and the grab handle fall out of the Jeep. Each Crawl Claw is side specific. Do not attempt to install a Crawl Claw on the incorrect side of the Jeep.
- NOTE:** The Crawl Claws are aluminum and may get hot. Use caution in extremely hot environments.

INSTALLATION PROCEDURE, FRONT



- Using the 18mm socket and ratchet, remove the outermost bolt next to the sun visor mount and the upper bolt holding the upper fascia to the A-pillar.



- Insert an 80mm bolt into the upper mounting point of the Crawl Claw. Slide the 1.625" spacer over the bolt.



3. With the 5mm hex key, install the assembly loosely into the upper window frame assembly.




4. Insert the 2.53" spacer between the Crawl Claw and A-pillar and feed the 100mm screw through the Crawl Claw and spacer and into the A-pillar hole.




5. Using the 5mm hex key install the assembly snugly, but not tight, into the A-pillar mounting point.
6. Fully tighten the upper mounting screw and then fully tighten the lower mounting point.
7. Repeat for the other side of the vehicle.
8. Your Fly Offroad Crawl Claw Front Grab Handles are now installed. Do yourself a favor and before you hit the trails give 'em a couple hard tugs to ensure your mounting points and hardware are tight, secure, and will hold weight.

INSTALLATION PROCEDURE, REAR

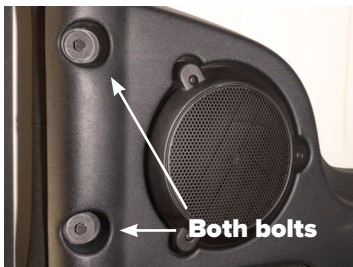

1. Using the 10mm socket & ratchet, remove the two bolts holding the speaker bar to the roof of the Jeep, 2 total. The speaker bar is supported in other locations so it will not fall down.

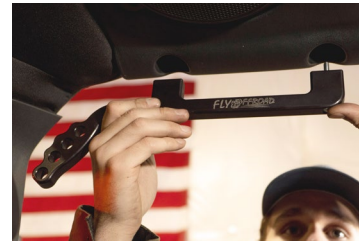

2. Insert one of the 65mm bolts into the Crawl Claw and mount into the appropriate location in the speaker bar. The handle should be forward towards the B-pillar.
3. Using the 4mm hex key snug the Crawl Claw into place.



4. Insert one of the 65mm bolts into the remaining mounting point on the Crawl Claw and mount into the appropriate location in the speaker bar.
5. Using the 4mm hex key snug the second bolt into place.
6. Once both mounting points are snug and properly aligned, tighten both bolts with your 4mm hex key.
7. Repeat for the other side of the vehicle.
8. Your Fly Offroad Crawl Claw Rear Grab Handles are now installed. Do yourself a favor and before you hit the trails give 'em a couple hard tugs to ensure your mounting points and hardware are tight, secure, and will hold weight.

LOVE THE GRAB HANDLES?

Then you'll love the Fly Offroad Claw Pad Foot Pegs for the Jeep JK Wrangler and JT Gladiator!

Fly Offroad's Claw Pad Foot Pegs are great looking, easily mount to the stock door hinge, and allow you to stretch your legs while wheeling with the doors off!

- Stretch your legs while crawling with your doors off
- Quickly and easily install into Jeep door hinge
- Forged steel, powder coated black
- Made in the USA
- 2-year warranty



Claw Pad Foot Pegs
#0195-02301

